



ACCENT 1.5 GL

FEATURES


- Gamma Ii 1.5l Mpi Engine
- (Driver Seat) Pumping Device
- 2-spoke Leather Steering Wheel
- ABS (Anti-locking Braking System)
- Alloy Wheels 16 Inch
- Auto Light Control
- Auto Temp. Control Air Conditioning (Single)
- Automatic Transmission Knob Artificial Leather
- Beltline Molding Satin Finish
- Bluetooth W/ Voice Recognition (W/custom)
- CC (Cruise Control) Conventional
- Drive Mode Select
- Electric Folding Mirrors
- ESC (Electronic Stability Control)
- Fabric Interior
- Front Thorax & Pelvis And Curtain Airbags
- HAC (Hill Start Assist Control)
- Hand Parking Brakes
- Immobilizer
- Keyless Entry (Folding)
- MSLA (Manual Speed Limit Assist)
- Mud Guards
- Paddle Shifter (Lever Type)
- PDW (Parking Distance Warning) Reverse w/o Button
- Power Windows (Driver - Auto Up/down & Safety)
- Radio w/ 8" Touch Screen Display
- RVM (Rear View Monitor) w/Switch
- Single Tilt'g - Power Sunroof
- Steering Wheel Audio Remote Control
- Supervision With 4.2 Inch Tft Lcd+ Rheostat
- TPMS (High Line): Tire Pressure Monitoring System
- Wireless Charger (Phone)



ACCENT 1.5


www.hyundaitt.com

www.massymotors.com • marketing@massymotors.com



FEATURES SHOWN MAY VARY

Exterior Colors

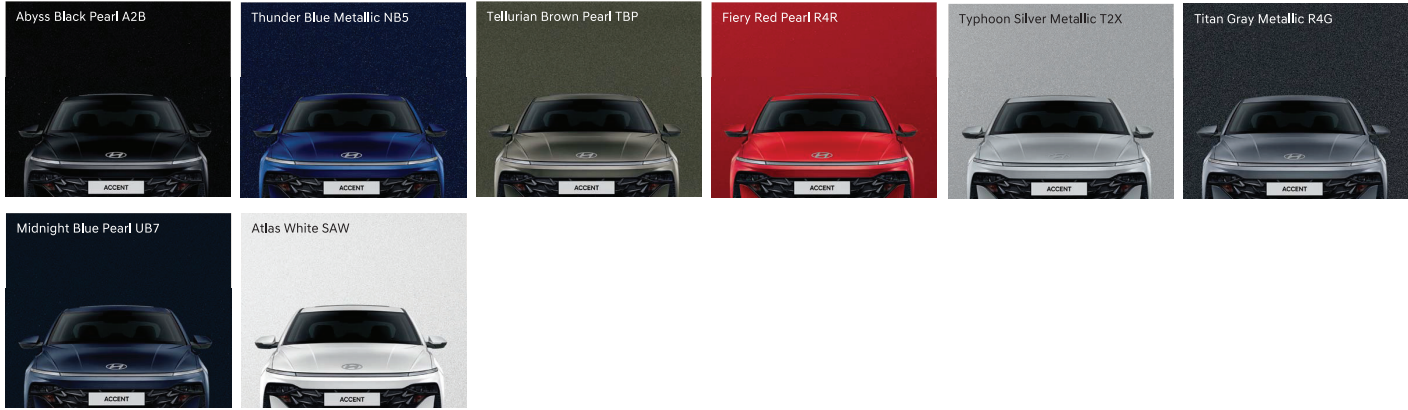

Specifications

Engine	Region		General (I2)			I3	I4	
	Type		Gamma II 1.5 MPI	U2 1.5	Gamma II 1.5 MPI	Gamma II 1.5 MPI		
EGR			O	X	X	X	O	X
General	Displacement (cc)		1,497	1,497	1,493	1,497	1,497	1,497
	Bore x Stroke (mm)		75.6 X 83.4	75.6 X 83.4	75.0 X 84.5	75.6 X 83.4	75.6 X 83.4	75.6 X 83.4
	Compression ratio		11.0	10.5	16.0	10.5	11.0	10.5
	Max.Power (ps/rpm)		115 / 6,300	115 / 6,300	115 / 4,000	115 / 6,300	115 / 6,300	115 / 6,300
	Max.Torque (kgf-m/rpm)		14.7 / 4,500	14.7 / 4,500	25.5 / 1,500 ~ 2,750	14.7 / 4,500	14.7 / 4,500	14.7 / 4,500
Cylinder layout		In-line	In-line	In-line	In-line	In-line	In-line	
Number of cylinders		4 cylinder	4 cylinder	4 cylinder	4 cylinder	4 cylinder	4 cylinder	
Cylinder block		Aluminum	Aluminum	Cast Iron	Aluminum	Aluminum	Aluminum	
Cylinder head		Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	
Cam type		DOHC D-CVVT	DOHC D-CVVT	DOHC 4 Valve	DOHC D-CVVT	DOHC D-CVVT	DOHC D-CVVT	
Valve system		16 Valve, HLA	16 Valve, HLA	16 Valve, HLA	16 Valve, HLA	16 Valve, HLA	16 Valve, HLA	
Ignition system		Spark Ignition	Spark Ignition	Compression Ignition	Spark Ignition	Spark Ignition	Spark Ignition	
Intake system		VIS	VIS	VGT Intercooler	VIS	VIS	VIS	
Fuel system		MPI	MPI	CRDI	MPI	MPI	MPI	
Emission control system		WCC+UCC	WCC	EU2/3/4 : CC-DOC	WCC	WCC+UCC	WCC	
Electric system	Alternator		13.5V, 110A	13.5V, 110A	w/micom : 13.5V, 130A	13.5V, 110A	13.5V, 110A	13.5V, 110A
	Starter		12V, 0.9kW	12V, 0.9kW	12V, 1.7kW	12V, 0.9kW	12V, 0.9kW	12V, 0.9kW
Engine lubricant oil capacity (ℓ)		3.8 (w/oil filter)	3.8 (w/oil filter)	4.8 (w/oil filter)	3.8 (w/oil filter)	3.8 (w/oil filter)	3.8 (w/oil filter)	
Cooling capacity (ℓ)		2.5 (Engine only)	2.3 (Engine only)	-	2.3 (Engine only)	2.5 (Engine only)	2.3 (Engine only)	

Dimensions



Overall width 1,729



Overall length 4,440
Wheel base 2,600

Overall height 1,460



Port of Spain
627-4250

Morvant
674-4200

San Fernando
657-8521

Tobago
639-2407



Hyundai TT www.massymotors.com marketing@massymotors.com

FEATURES SHOWN MAY VARY